



FILM CORES

Fibre Foils Limited (**FFL**) specialises in the manufacture of Film Cores for various industries including Plastic films (Polyester, BOPP, BOPET, Stretch & Shrink films, etc.) industry.

With world class manufacturing facilities, FFL offers **micro finished cores** of international standards in a wide range of sizes and types.



The film cores manufactured by FFL have set industry standards and have earned the trust and confidence of a large number of customers.

FFL believes in working as partners with their customers to provide products that both can be proud of, meeting specific requirements that reflect a good value investment demonstrated by profitable operating results.



CORE TYPES AVAILABLE

Depending on each customer specification, FFL offers cores to suit their needs. For plastic film and packaging industry FFL offers: Economy, Deluxe, Supreme, Excel and Ultra type of cores.

The indicative compression strength values for the most popular cores of inner diameter 76.2 mm and 152.4 mm are given overleaf.

ADVANTAGES

- Reduced wastage while winding/unwinding due to superior surface finish
- Bowing of cores at its absolute minimum
- Surface waviness is at its absolute minimum
- Roundness deviation at its absolute minimum
- Option of varnish/wax/resin coating available
- Can replace plastic and metal cores
- Cost-effective and repeat usage possible
- Eco-friendly and recyclable

RANGE

Inner diameter: 76.2 mm to 304.8 mm

Wall thickness: 8 mm to 18 mm

APPLICATIONS

Winding and re-winding of Plastic films (Polyester, BOPP, BOPET, Stretch & Shrink films, etc.) and Flexible Packaging materials.

**AN ISO 9001:2000 COMPANY
with Design Certification**


FILM CORES






FILM CORES – INDICATIVE STRENGTH PROPERTIES

Flat Compression Strength of Film Cores for dia. 76.20 mm

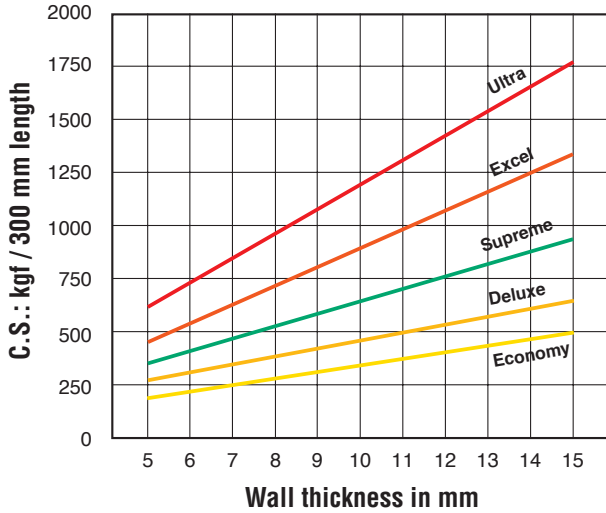

Film Core Grade	Wall thickness in mm										
	5	6	7	8	9	10	11	12	13	14	15
Economy	185	205	230	255	280	310	340	375	410	450	495
Deluxe	270	265	295	330	365	400	440	485	535	585	645
Supreme	350	390	430	480	530	580	640	700	775	850	935
Excel	450	500	460	620	755	830	910	1000	1100	1210	1335
Ultra	615	685	760	845	940	1045	1160	1290	1430	1590	1770

Flat Compression Strength of Film Cores for dia. 152.40 mm

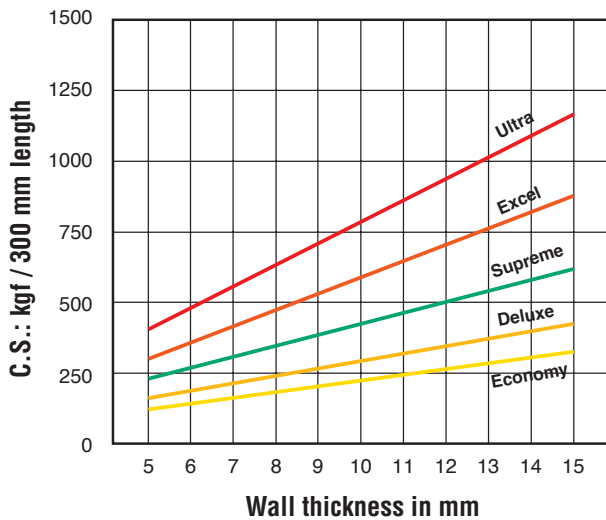

Film Core Grade	Wall thickness in mm										
	5	6	7	8	9	10	11	12	13	14	15
Economy	120	135	150	170	185	205	225	250	270	295	325
Deluxe	160	175	195	220	240	265	290	320	355	385	425
Supreme	230	260	285	315	350	385	420	465	510	560	620
Excel	300	330	370	410	500	550	600	660	730	800	880
Ultra	405	450	500	560	620	690	765	850	945	1050	1170



FIBRE FOILS LIMITED

Regd. Office:

A/6, M.I.D.C., Road No. 5, Andheri (East), Mumbai - 400 093 (India).

Tel.: 2832 6228 / 2832 8609 • Fax: 91-22-2837 2145

E-mail: shetron@vsnl.com • Website: www.shetrongroup.com

**AN ISO 9001:2000 COMPANY
with Design Certification**